



**UNI-ROYAL**  
厚聲集團

# DATA SHEET

**Product Name** Array Type Cement Temperature Fusing Resistors

---

**Part Name** TFRC 2W  $\pm 5\%$  360  $\Omega$ 、200  $\Omega$ 、1K  $\Omega$

**File No.** DIP-SP-083

## **Uniroyal Electronics Global Co., Ltd.**

88#, Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email [marketing@uni-royal.cn](mailto:marketing@uni-royal.cn)

Manufacture Plant Uniroyal Electronics Industry Co., Ltd.

Aeon Technology Corporation

Royal Electronic Factory (Thailand) Co., Ltd.

Royal Technology (Thailand) Co., Ltd.

## 1. Scope

This datasheet is the characteristics of Array Type Cement Temperature Fusing Resistors manufactured by UNI-ROYAL.

## 2. Part No. System

The standard Part No. includes 14 digits with the following explanation:

2.1 These 4 digits are to indicate the product type :

Example:TFRC=TFRC- type

2.2 5<sup>th</sup>~6<sup>th</sup> digits:

2.2.1 For power of 1 watt to 16 watt ,the 5th digit will be a number or a letter code and the 6<sup>th</sup> digit will be the letters of W.

Example: 2W=2W;

2.3 The 7<sup>th</sup> digit is to denote the Resistance Tolerance. The following letter code is to be used for indicating the standard Resistance Tolerance.

J=±5%

2.4 The 8<sup>th</sup> to 11<sup>th</sup> digits is to denote the Resistance Value.

2.4.1 For Cement Fixed Resistors the 8<sup>th</sup> digits will be coded with “W”or “P”to denote Wire-wound type or Power Film type respectively of the Cement Fixed Resistor product. the 9<sup>th</sup> & 10<sup>th</sup> digits are to denote the significant figures of the resistance and the 11<sup>th</sup> digit is the number of zeros following

Example: P102=1KΩ

2.5 The 12<sup>th</sup>, 13<sup>th</sup> & 14<sup>th</sup> digits.

2.5.1 The 12th digit is to denote the Packaging Type with the following codes: B=Bulk/Box


2.5.2 The 13<sup>th</sup> digit is normally to indicate the Packing Quantity, This digit should be filled with “0”for the Cement products with“Bulk/Box”packing requirements.

2.5.3 For some items, the 14<sup>th</sup> digit alone can use to denote special features of additional information with the following codes or standard product

Example: 0= standard product


## 3. Ordering Procedure

(Example: TFRC 2W ±5% 360Ω B/B )

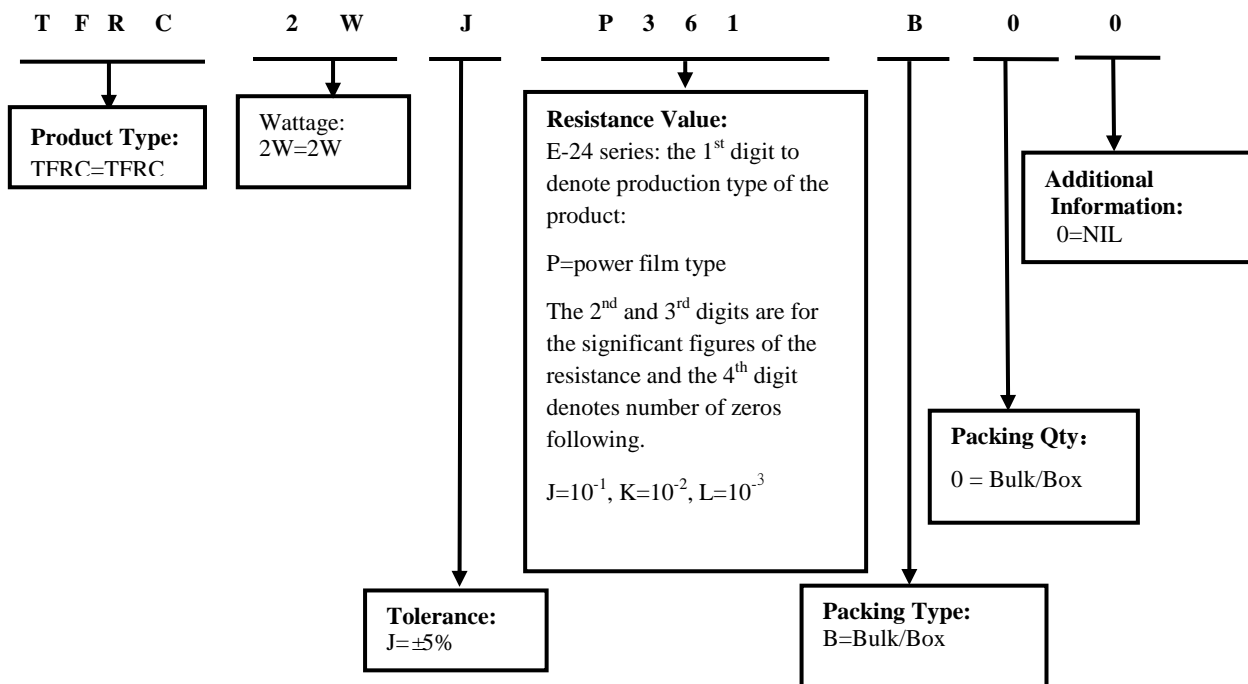

#### 4. Marking

Example:

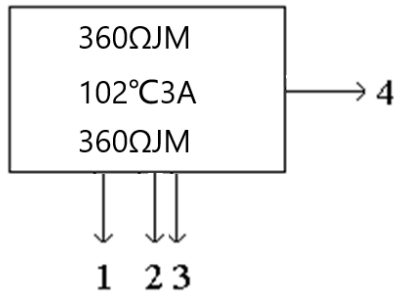


Code description and regulation:

1. Nominal Resistance Value
  - 2 Resistance Tolerance. J:  $\pm 5\%$
  - 3 Pattern:  
M: Power film
  4. Function temperature, Rated current
- Color of marking: Black Ink

#### 5. Dimension & Ratings

##### 5.1 Dimension

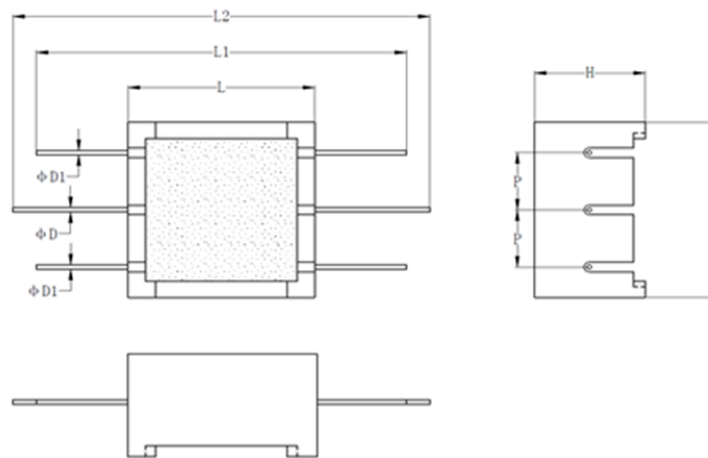


Type	Dimension(mm)								Resistance Range
	L $\pm 0.5$	L1 $\pm 3$	L2 $\pm 3$	W $\pm 0.5$	H $\pm 0.5$	P $\pm 0.3$	$\Phi D \pm 0.04$	$\Phi D1 \pm 0.04$	Power Film
TFRC 2W	16	80	80	16.2	8	5	0.58	0.8	360 $\Omega$
	17.5	70.5	83.5	17	8.5	5	1	0.8	200 $\Omega$
									1K $\Omega$

##### 5.2 Ratings

Type	Tolerance	Resistance Range	Function temperature	Rated current	Rated voltage
TFRC 2W	$\pm 5\%$	360 $\Omega$	102 $^{\circ}\text{C}$	3A	AC250V
		200 $\Omega$	94 $^{\circ}\text{C}$	10A	AC250V
		1K $\Omega$	99 $^{\circ}\text{C}$	10A	

## 6. Derating Curve

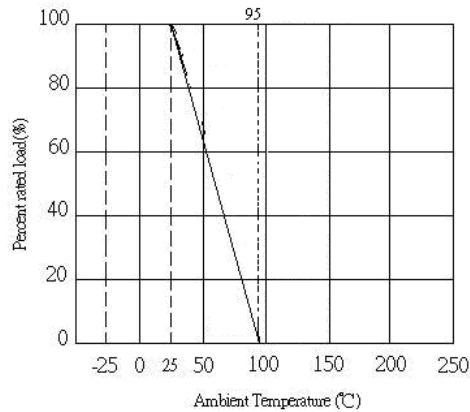

### 6.1 Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:

$$RCWV = \sqrt{P \times R}$$

Where: RCWV = rated dc or RMS ac continuous working voltage at commercial-line frequency and waveform (VOLT.)

P = power rating (WATT.)

R = nominal resistance (OHM)

## 7. Performance Specification

Characteristic	Limits	Test method (GB/T 5729&JIS-C-5201&IEC60115-1)
Short-time overload	Resistance change rate must be in $\pm(5\%+0.05\Omega)$ , and no mechanical damage.	4.13 Permanent resistance change after the application of a potential of 2.5 times R <sub>cwv</sub> for 5 seconds.
Solderability	95% Coverage Min.	4.17 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Test temp. Of solder: 245°C $\pm$ 3°C Dwell time in solder: 2~3seconds.
Resistance to soldering heat	Resistance change rate must be in $\pm(1\%+0.05\Omega)$ , and no mechanical damage.	4.18 Permanent resistance change when leads immersed to a point 2.0-2.5mm from the body in 260°C $\pm$ 5°C solder for 10 $\pm$ 1 seconds.
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down.	4.7 Apply 1000V for 60~70 seconds.
Terminal strength	No evidence of mechanical damage	4.16 Direct load: Resistance to a 2.5 kg direct load for 10 seconds in the direction of the longitudinal axis of the terminal leads. Twist test: Terminal leads shall be bent through 90° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.
Humidity (Steady State)	$\Delta R/R$ : $\pm(5\%+0.1\Omega)$ Max. With no evidence of mechanical damage.	7.9 Resistance change after 1,000 hours without load in a humidity test chamber controlled at 40°C $\pm$ 2°C and 90 to 95% relative humidity.
Load life	$\Delta R/R$ : $\pm(5\%+0.1\Omega)$ Max. With no evidence of mechanical damage.	4.25.1 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of 1.5 hours "ON", 0.5 hour "OFF" at 25°C $\pm$ 2°C ambient.



**8. Note**

- 8.1. UNI-ROYAL recommend products store in warehouse with temperature between 15 to 35 °C under humidity between 25 to 75%RH.  
 Even under storage conditions recommended above, solder ability of products will be degraded stored over 1 year old.
- 8.2. Cartons must be placed in correct direction which indicated on carton, otherwise the reel or wire will be deformed.
- 8.3. Storage conditions as below are inappropriate:
  - a. Stored in high electrostatic environment
  - b. Stored in direct sunshine, rain, snow or condensation.
  - c. Exposed to sea wind or corrosive gases, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>2</sub>, Br,etc.

**9. Record**

Version	Description	Page	Date	Amended by	Checked by
1	First version	1~5	Nov.08, 2022	Song Nie	Haiyan Chen

© Uniroyal Electronics Global Co., Ltd. All rights reserved. Specification herein will be changed at any time without prior notice